


THIN SMD LOW / MEDIUM-FREQUENCY CRYSTAL UNIT

MC-206

Product number (please refer to page 1)

Q1 x MC206xxxxx00

- High-density mounting-type SMD of Max. 2.0 mm thickness.
- High heat resistance allows reflow soldering.
- Excellent environmental capability.
- Available for lead (Pb)-free soldering.
- Available for lead (Pb)-free terminal.

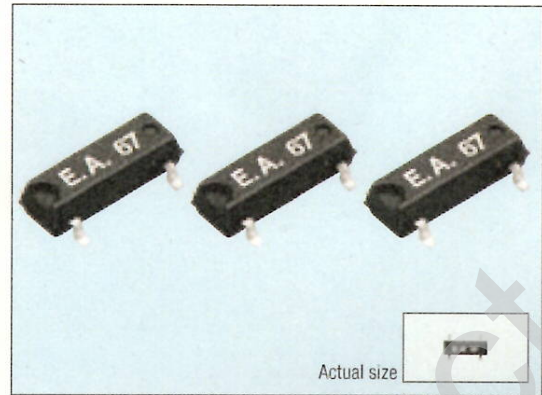

■ Specifications (characteristics)


Item	Symbol	Specifications		Remarks
Nominal frequency range	f	32.768 kHz	32.000 kHz to 100.000 kHz	please contact us for inquiries about the available frequency
Temperature range	Storage temperature	T _{STG} -55 °C to +125 °C		Stored as bare product after unpacking
	Operating temperature	T _{OPR} -40 °C to +85 °C		
Maximum drive level	GL	1.0 μW Max.		
Frequency tolerance (standard)	Δf/f	±20 x 10 ⁻⁶ , ±50 x 10 ⁻⁶	±50 x 10 ⁻⁶ , ±100 x 10 ⁻⁶	T _a = +25 °C, DL = 0.1 μW
Peak temperature (frequency)	θT	+25 °C ±5 °C		
Temperature coefficient (frequency)	a	-0.04 x 10 ⁻⁶ /°C ² Max.		
Load capacitance	C _L	7 pF, 12.5 pF		Please specify
Series resistance	R _s	55 kΩ Max.	50 kΩ to 20 kΩ	As per below table
Motional capacitance	C ₁	1.8 fF Typ.	3.0 fF	
Shunt capacitance	C ₀	0.9 pF Typ.	1.5 pF	
Insulation resistance	IR	500 MΩ Min.		
Aging	f _a	±3 x 10 ⁻⁶ / year Max.	±5 x 10 ⁻⁶ / year Max.	T _a = +25 °C ±3 °C, first year
Shock resistance	S.R.	±5 x 10 ⁻⁶ Max.		Three drops on a hard board from 750 mm or excitation test with 29400 m/s ² x 0.3 ms x 1/2 sine wave x 3 directions

■ Series resistance

Frequency (kHz)	32 ≤ f < 38	38 ≤ f < 65.536	65.536 ≤ f < 75	75 ≤ f ≤ 100
Series resistance (Ω)	50 kΩ Max.	40 kΩ Max.	25 kΩ Max.	20 kΩ Max.

■ External dimensions

(Unit: mm)

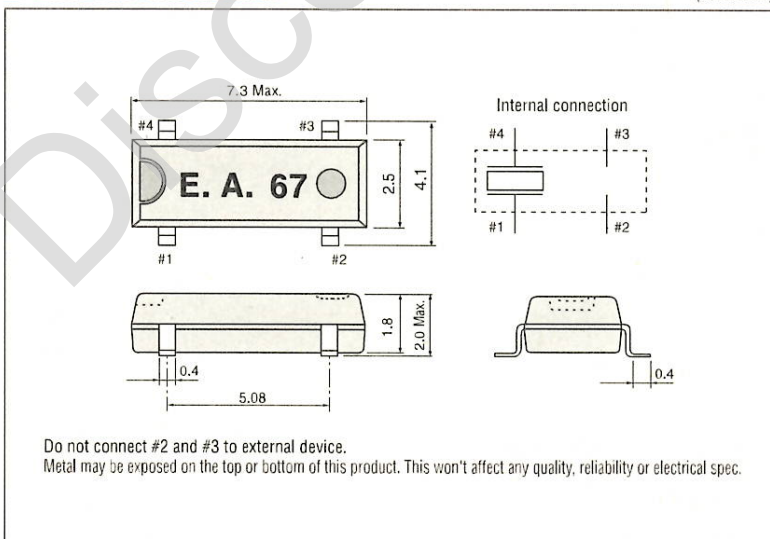

■ Recommended soldering pattern

(Unit: mm)

